


## SISTEMI DI PULIZIA LASER PER RULLI ANILOX



- ◆ **Semplice e di facile utilizzo**
- ◆ **Non richiede consumabili**
  - ◆ **Migliora la qualità della stampa**
  - ◆ **Lavaggio energetico e in profondità**
  - ◆ **Nessun costo per residuo di lavorazione**

TECHNICAL SPECIFICATIONS

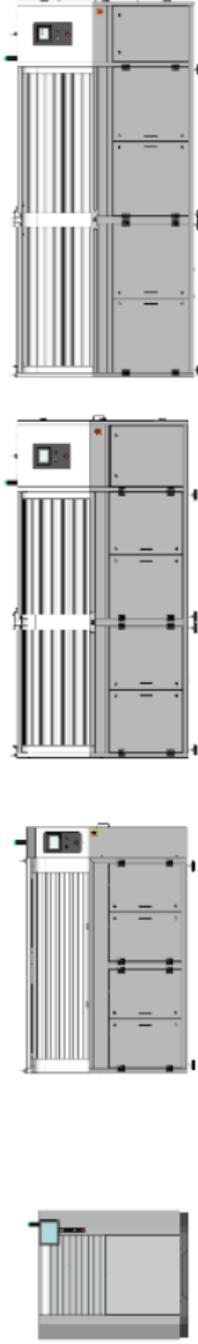

| MODEL                  | SN 1.0                             | SXL 1700 AF                        | SXL 2200 AF                        | SXL 2900 AF                        |
|------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| Total Length           | 1380mm / 54.5"                     | 2450mm / 96.5"                     | 3345mm / 131.75"                   | 4050mm / 159.5"                    |
| Total Height           | 1572mm / 62"                       | 1750mm / 69"                       | 1860mm / 73"                       | 1860mm / 73"                       |
| Total Width            | 670mm / 26.5"                      | 1000mm / 39.5"                     | 1255mm / 49.5"                     | 1255mm / 49.5"                     |
| Total machine weight   | 350Kg / 771.5lb                    | 700Kg / 1543lb                     | 1000Kg / 2204.5lb                  | 1200Kg / 2645.5lb                  |
| Maximum clean length   | 800mm / 31.5"                      | 1645mm / 64.75"                    | 2268mm / 89.5"                     | 2968mm / 116.75"                   |
| Maximum clean diameter | 125mm / 5"                         | 145mm / 5.75" (without AF 235mm)   | 235mm / 9.25" (without AF 325mm)   | 235mm / 9.25" (without AF 325mm)   |
| Minimum clean diameter | 45mm / 1.75"                       | 50mm / 2" (without AF 50mm)        | 50mm / 2" (without AF 125mm)       | 50mm / 2" (without AF 125mm)       |
| Total roll weight      | 80Kg / 176.5lb                     | 250Kg / 551lb                      | 250Kg* / 551lb                     | 250Kg* / 551lb                     |
| Electrical power       | 2.5 KW                             | 2.5 KW                             | 2.5 KW                             | 2.5 KW                             |
| Electrical supply      | 230/400/415/440/480 Vac I +N +PE** |
| Frequency              | 50/60 Hz                           | 50/60 Hz                           | 50/60 Hz                           | 50/60 Hz                           |
| Air supply             | 100l/min 2bar                      | 100l/min 2bar                      | 100l/min 2bar                      | 100l/min 2bar                      |

\* For weights over 100Kg it is necessary to include the option of reinforced jaws.

\*\* A stable tension must be guaranteed at the machine electrical supply. In case of unstable electrical supply, it is advisable to influence the option of voltage stabilizer or UPS equipment.



**SIMONAZZI** s.r.l.

Sede Amministrativa e Magazzino

20060 PESSANO con BORNAGO (MI) - Via Aldo Moro, 57/79

Tel.: +39.02.95.74.90.73 - +39.02.95.74.90.74 - Fax +39.02.95.74.99.08

Sede legale: 20125 MILANO (ITALIA) - Via Popoli Uniti, 11/13

Partita IVA IT 07750010154 - www.simonazzi.it